

SECTION 7

Tenant Sign Criteria

TENANT SIGN CRITERIA

Building Parameters:
Pad Site Tenant Leasable area 0 – 13.999 s.f.

Small Shop Tenant -Leasable area 0 – 11,999 s.f.

Sub-Major Tenant -Leasable area 12,000 – 19,999 s.f.

Major Tenant – Leasable area more than 20,000 s.f.–119,999

Anchor Tenant – More than 120,000 s.f.

Tenant Signage Design Criteria

In the event of any conflict between the following signage requirements and local governmental ordinances, the more stringent will prevail. Upon written notice from Landlord, Tenant agrees to take such actions as may be necessary to comply at Tenant's expense, with applicable requirements.

The purpose of this section is to define and specify all exterior signage criteria for Corbin Park. (Entrance monuments will be addressed in the architectural plans). Each Tenant shall provide signage package for its space as described below.

All sign packages shall be submitted in triplicate for approval at least one hundred twenty (120) days of Lease Commencement Date to Landlord and Landlord's Architect prior to fabrication and installation. At a minimum, such drawings must show locations, sizes, and styles of lettering, materials, and types of illumination, installation details and logo design. Upon approval, Landlord will issue a letter of approval to the tenant for use in obtaining a sign permit from the city.

If the plans are disapproved by Landlord, Tenant shall resubmit them within fifteen (15) days from date of the notice of any disapproval by Landlord, or its Architect until such plans are finally approved by Landlord.

The cost of the fabrication, permitting and installation shall be the responsibility of each individual tenant. Sign construction is to be completed in compliance with local building code requirements and sign ordinances, and the instructions, limitations and criteria contained in this manual. Each sign will conform to the limitations listed in this document below.

Sign Types and Parameters
The following types and amounts of signs will be permitted:

Small Shop Tenant Sign Parameters (0 - 11,999 s.f.)

- The maximum height for letters in the body of the sign is listed on the SIGNAGE SIZE KEY MAP. (max size at discretion of Landlord)
- Signs shall not extend more than 8" beyond the face of the surface to which the sign is mounted.
- One (1) wall/marquee sign will be allowed at the storefront, one (1) will be allowed at the rear facade, and one (1) additional will be allowed at the storefront if the tenant is an endcap.
- Signage shall be illuminated individual letters mounted to the face of the building. The use of a colored or frosted Plexiglas face is required. Individual faces shall be fabricated from flat, smooth one-eight inch (1/8") plexiglass. Letter returns shall be fabricated of .090 aluminum with .063 aluminum letter backs, fully welded. Retainers shall be one inch (1") trimcap or the equivalent and shall match the return. All letters shall be illuminated.

11/22/08 Rev.

- All signs must be illuminated from a concealed source. No exposed lamps, globes, tubes, etc. will be permitted.
- Marquee Signage: Allowed one (1) per storefront in lieu of Façade sign 15 s.f. square feet maximum, letters shall be 16" maximum; maximum of two (2) total if an endcap. Sign shall be individually Illuminated letters, pin mounted to existing projected metal marquees. All exposed conduit shall be concealed from public view and painted to match marquee structure. Exposed raceways behind letters are not permitted. Marquis signage is subject to Landlord and City review and will be approved on an individual basis and shall be treated as a primary sign.
- Blade Signage: Allowed one (1) per storefront, seven (7) square feet max. Letter height shall be six (6) inches max.

 Blade signs are only allowed if below a canopy.

 The blade sign shall be located on an elevation drawing, with clear height to bottom of sign indicated. Decorative brackets and sign design are to reflect the qualities of the tenant and the shopping center design in it's greater entirety.
- · Placque: A 4 sf wall mounted Placque shall be allowed in lieu of a blade sign, in areas not under a canopy. Max letter height of 6".

Pad Site Sign Parameters (0-13,999 s.f.)

- Tenant sign area shall be on the building faces above the entrances and as part of the building design.
- The maximum height for letters in the body of the sign is listed on the SIGNAGE SIZE KEY MAP (max size at discretion of Landlord)
- The sign areas shall not exceed ten percent (10%) of the area of the facade.

- Maximum one sign per facade with a maximum of (3) three.
- Signage shall be illuminated individual letters mounted to the face Of the building. The use of a colored or frosted Plexiglas face is required. Individual faces shall be fabricated from fl at, smooth one-eight inch (1/8") Plexiglas. Letter returns shall be fabricated of .090 aluminum with .063 aluminum letter backs. Retainers shall be one inch (1") trim cap or the equivalent and shall match the return. All letters shall be illuminated.
- Marquee Signage: Allowed one (1) per storefront in lieu of Façade sign 15 s.f. square feet maximum, letters shall be 16" maximum; maximum of two (2) total if an endcap. Sign shall be individually illuminated letters, pin mounted to existing projected metal marquees. All exposed conduit shall be concealed from public view and painted to match marquee structure. Exposed raceways behind letters are not permitted. Marquis signage is subject to Landlord and City review and will be approved on an individual basis and shall be treated as a primary sign.
- One sign per building elevation with a maximum of (3) three total.
- All signs must be illuminated from a concealed source. No exposed lamps, globes, tubes, etc. will be permitted.
- · Reverse channel halo lighting is encouraged.

Sub-Major Tenant Sign Parameters (12,000 – 19,999 s.f.)

- Tenant sign area shall be on the building faces above the entrances and as part of the building design.
- The maximum height for letters in the body of the sign is listed on the SIGNAGE SIZE KEY MAP. (max size at discretion of Landlord)

- The sign areas shall not exceed ten percent (10%) of the area of the facade.
- Maximum one sign per facade with a maximum of (3) three.
- Signage shall be illuminated individual letters mounted to the face of the building. The use of a colored or frosted Plexiglas face is required. Individual faces shall be fabricated from fl at, smooth one-eight inch (1/8") Plexiglas. Letter returns shall be fabricated of .090 aluminum with .063 aluminum letter backs. Retainers shall be one inch (1") trim cap or the equivalent and shall match the return. All letters shall be illuminated.
- All signs must be illuminated from a concealed source. No exposed lamps, globes, tubes, etc. will be permitted.
- Reversed halo lighting is encouraged.

Major Tenant (More than 20,000 s.f. to 119,999)

- Tenant sign area shall be on the building faces above the entrances and as part of the building design.
- The maximum height for letters in the body of the sign is listed on the SIGAGE SIZE KEY MAP. (max size at discretion of Landlord)
- The sign areas shall not exceed ten percent (10%) of the area of the storefront.
- Maximum one sign per facade with a maximum of (3) three.
- Signage shall be illuminated individual letters mounted to the face of the building. The use of a colored or frosted Plexiglas face is required. Individual faces shall be fabricated from fl at, smooth one-eight inch (1/8") Plexiglas. Letter returns shall be fabricated of .090 aluminum with .063 aluminum letter backs. Retainers

- shall be one inch (1") trim cap or the equivalent and shall match the return. All letters shall be illuminated.
- All signs must be illuminated from a concealed source. No exposed lamps, globes, tubes, etc. will be permitted.
- Reverse channel halo lighting is encouraged.

Anchor Tenant (More than 120,000 s.f.)

- Tenant sign area shall be on the building faces above the entrances and as part of the building design.
- The maximum height for letters in the body of the sign is listed on the SIGNAGE SIZE KEY MAP. (max size at discretion of Landlord)
- The sign areas shall not exceed ten percent (10%) of the area of the storefront.
- Maximum one sign per storefront with a maximum of (3) three.
- Signage shall be illuminated individual letters mounted to the face of the building. The use of a colored or frosted Plexiglas face is required. Individual faces shall be fabricated from fl at, smooth one-eight inch (1/8") Plexiglas. Letter returns shall be fabricated of .090 aluminum with .063 aluminum letter backs. Retainers shall be one inch (1") trim cap or the equivalent and shall match the return. All letters shall be illuminated.

General Sign Perameters

 In general signs must be made up of individual illuminated letters; conventional box signs that include attractive and distinctive designs with details such as raised letters will be considered on an individual basis.

- Lettering on all store signs shall be limited to business or trade name of the premises as it appears on the lease. No sign manufacturer's name, union labels, or other lettering shall be visible. Logo signs will be reviewed on an individual basis, but in general logos will not be allowed.
- Tag lines shall be allowed on an individual basis only and are subject to Landlord approval. Any allowable tag lines shall be individual illuminated letters (no box signs) and shall not exceed 10" in height. The width of the tag line shall not exceed the width established for the primary signage.
- No exterior sign or sign panel will be permitted to extend above any roof line.
- Any sign, notice or other graphic or video display, particularly self-illuminated signs, located within the store and which is easily visible from the shopping center will not be allowed. Illuminated Signs within 48" of a window are regarded as signage.
- Manufacturers' labels, underwriters' labels, clips, brackets, or any other form of extraneous advertising attachment or lighting devices shall be fully concealed from public view.
- No exposed lamps or tubing will be permitted.
- No exposed raceways, crossovers or conduits will be permitted.
- All signage returns shall be semi-glass black enamel finish or blend with adjacent building color.
- All cabinets, conductors, transformers and other equipment shall be concealed from public areas. Visible fasteners will not be permitted.
- All metal letters, including channel letters, shall be fabricated

- using fully-welded construction, with all welds ground smooth so as not to be visible.
- Acrycap or trimcap retainers used at the perimeter of sign letter faces shall match in color and finish the face or the sides of the sign.
- Threaded rods or anchor bolts shall be used to mount sign letters, which are spaced out from the building face. Angle clips attached to letter sides will not be permitted. All mounting attachments shall be sleeved and painted, and concealed.
- All signage whether halo illuminated or not, shall be pin
 mounted on building façade. Halo illuminated signage shall be
 pin mounted a minimum of 2" from builder façade. Direct or
 internally illuminated signage shall be pin mounted a minimum of
 1/2" and maximum of 1" from building face.
- Except as provided herein, no advertising placards, flags, balloons, banners, pennants, names, insignia, trademarks, or other descriptive materials shall be affixed or maintained upon the glass panes and supports of the storefront windows and doors, within 4' of the storefront without prior written approval of the Landlord. Painted, flashing, animated, audible, revolving, or other such signs that create animation are not permitted.
- Any Plexiglas sign faces shall not be clear.
- Sign illumination shall be internal and self contained.
- Non-illuminated signs on the inside of window are not regulated by ordinances.
- Non-illuminated exterior signage is allowed upon approval and receipt of a Special Event Permit from City.

- All main signs are to be centered in the signage band.
- All electric signs and installation methods must meet UL standards and contain a UL label.
- At no time will hand-lettered, non-professional signs, or newspaper advertisements be displayed on the storefronts or within the Design Control Area.
- Decals or other signing indicating products lines or credit card acceptability shall not be permitted on the storefront glazing other than stores operating hours.
- All illuminated signs must be turned on during the Center's normal operating hours. The use of time clocks for sign and show window lighting is required. Lighting of signs shall be at hours required by Landlord.
- No logos will be allowed on Tenant storefronts without prior written approval.
- Double stacked lettering shall be allowed on an individual basis only and are subject to Landlord approval. Double stacked letters shall be a maximum 24" high individual letters and shall comfortably fit within the Landlord bulkhead as determined by the Landlord's Representative.
- Minimum height of all signage shall not be less than 60% of the maximum allowable letter height except for approved taglines.
- All signage is subject to the approval of the Landlord's Architect and the local authorities. Landlord has design discretion of overall size and height of letters and signs.
- Tenants are required to provide a concealed access panel from within the Tenant's leasable area, if applicable, to service and

install exterior building signage

Signs Not Permitted

The following types of signs shall not be permitted:

- Signs such as die cut vinyl, gold or silver leaf, or paint.
- Boxed pillow or cabinet type, (unless approved by Landlord's Architect.
- Formed plastic or injection molded plastic signs.
- Banners or pennants without Special Event Permit from City.
- Signature signage (window sign or sign plate indicating name of shop or good sold) in addition to primary signage.
- Cloth, paper, cardboard and similar stickers or decals around or on surfaces on the storefront without prior written approval.
- "Sale" sign, "Special Announcements" sign or other advertisement of any kind on the exterior without Special Event Permit from City.
- Exposed neon signs.
- Banners on outparcel lots except for those allowed by Special Event Permit from City.
- Animated, moving, rotating or flashing.
- Noise making.
- Additional signage of any kind within 4' of storefront windows.
- Awning signage.
- Use of the word "Outlet" in the signage text is prohibited.


Additional Signage

Service doors to Tenant spaces throughout the project shall be standard 4", identification only (name and address number) and shall be installed by the Tenant. The Tenant shall not apply any signage or other wording to service doors.

- All signage must be shown to scale on the approved storefront elevation.
- All additional signage shall be submitted to the Landlord's Representative for approval as specified in Section Two.
- Any minor deviations to this criteria will be reviewed on an individual basis and subject to Landlord approval.

Environmental Graphics

- Must be non-commercial graphics.
- Must be front lit with concealed or other non-exposed type lighting system. No backlit lighting is allowed.
- Glass is required and must be flush or recessed from facade opening.
- Graphics must integrate with building facade design.
- Designs must integrate with the overall shopping center design.

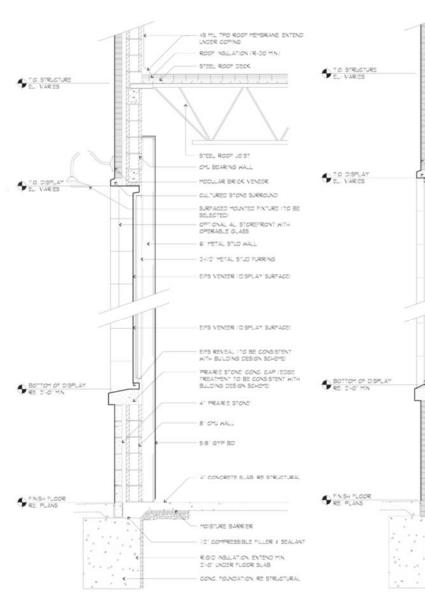

NON-COMMERCIAL DISPLAY WITH SURFACED MOUNTED FIXTURE

NON-COMMERCIAL DISPLAY WITH COVE LIGHT AND OPERABLE GLASS ENGLOSURE

11/22/08 Rev.

45 ML TRO ROOF MEMBRANE, EXTEND UNDER COPING

ROOF INSULATION (R-20 MIN.)

STEEL ROOF DECK

STEEL ROOF JOIST

CMJ BEARING WALL

6" METAL STUD WALL

MODULAR BRICK VENEER

GULTURED STONE SURROUND

OPTIONAL AL STOREFRONT WITH OPERABLE GLASS

EIFS VENEER IDISPLAY SURPACE!

PHOTOVOLTAIC WALL-WASH LIGHT

PRARIE STONE CONG. CAP (EDGE TREATMENT TO BE CONSISTENT WITH

4" CONCRETE SLAB, RE STRUCTURAL

12 COMPRESSIBLE FILLER & SEALANT

RIGID INSULATION EXTENDIMIN.

2'-0' UNDER FLOOR SLAB CONC. FOUNDATION RE STRUCTURAL

BULDING DESIGN SCHEME!

4" PRAIRIE STONE" OR BRICK BASE


B" CML WALL

MOISTURE BARRIER

Directional Signage


- Sign must not exceed four (4) square feet in total size.
- Logo must not exceed one (1) square foot.
- Directional signage must not exceed three (3) square feet.

- Sign support structure for directional signage must not exceed five (5) feet in height unless a deviation is granted.
- A deviation is required to include directional signage on entry markers.

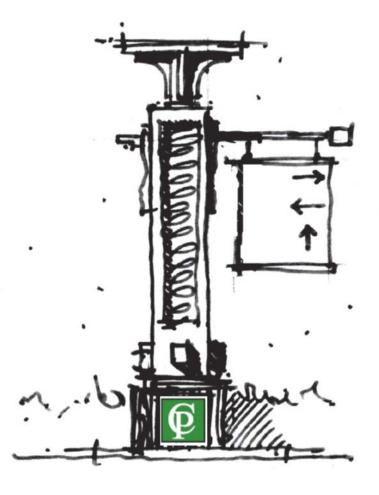





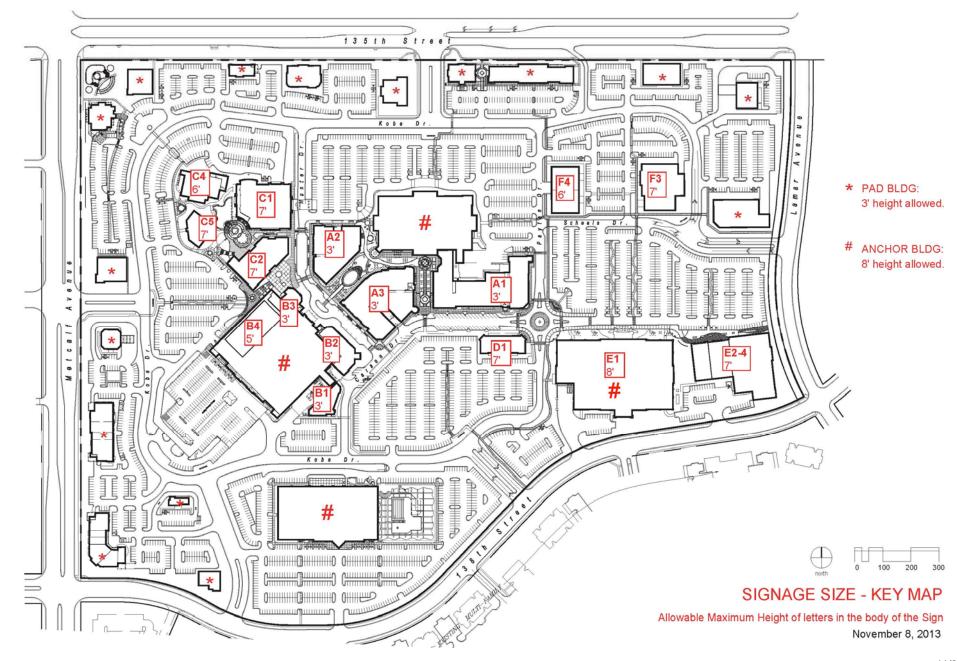

11/22/08 Rev.